


R1000

ROOF DRAIN CAST IRON BODY WITH 15" CAST IRON-DOME

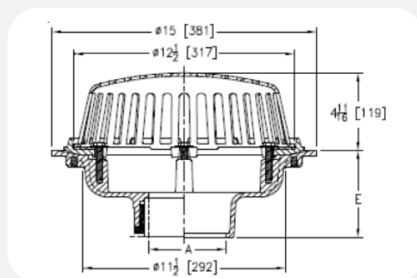

PRODUCT SPECIFICATION: 15" [381mm] Diameter roof drain, Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and cast-iron dome

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
2, 3, 4 [51, 76, 102]	26 [12]	103 [665]
5, 6 [127, 152]	27 [12]	
8 [203]	28 [13]	

PIPE SIZE

3, 4, 5, 6 [76, 102, 127, 152]

2, 3, 4, 6, 8 [51, 76, 102, 152, 203]

2, 3, 4, 6, 8 [51, 76, 102, 152, 203]

2, 3, 4 [51, 76, 102]

6 [152]

(Specify size/type) OUTLET

_C Inside Caulk

_P Threaded

_NH No-Hub

_NL Neo-Loc

_NL Neo-Loc

'E' BODY HT. DIM.

5-1/4 [133]

3-3/4 [95]

5-1/4 [133]

4-9/16 [116]

5-7/16 [112]

PREFIXES

RC - Cast Iron body Assembly Cast Iron Dome*

RA - Cast Iron body Assembly Aluminium Dome

RP - Cast Iron body Assembly Poly Dome

SUFFIXES

- **AC** Angular Underdeck Clamp
- **AR** Acid Resistant Epoxy Coated Cast Iron
- **AW** 3/4 [19] to 4 [102] Adj. Water Level Regulator
- **C** Underdeck Clamp
- **DP** Top-Set® Roof Deck Plate
- **DE** Deck Extension
- **DR** Top-Set® Drain Riser
- **E** 2 [51] High Static Extension (Specify Height)
- **EA** Adjustable Extension Assembly
2-1/8 [54] thru 3-1/2 [89]
- **EB** Top-Set® Adjustable Extension Assembly
- **FG** Flush Grate (Replaces Dome Strainer)
- **G** Galvanized Cast Iron
- **HD** 6-3/4 [171] High Aluminum Dome Strainer
- **R** Roof Sump Receiver
- **SC** Secondary Clamping Collar
- **SS** Stainless Mesh Screen Over Dome
- **ST** Dome with Solid Top
- **TC** Neo-Loc Test Cap Gasket
(2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)
- **VP** Vandal-Proof Secured Top
- **W2** 2 [51] Internal Water Dam
- **W3** 3 [76] Internal Water Dam
- **W4** 4 [102] Internal Water Dam
- **84** Stainless Steel Perforated Gravel Guard
- **85** Stainless Steel Perforated Extension
- **89** 2 [51] High External Water Dam
- **90** 90° Threaded Side Outlet Body