


R1640

COMBINATION MAIN ROOF & OVERFLOW DRAIN WITH 12" CAST IRON-DOME

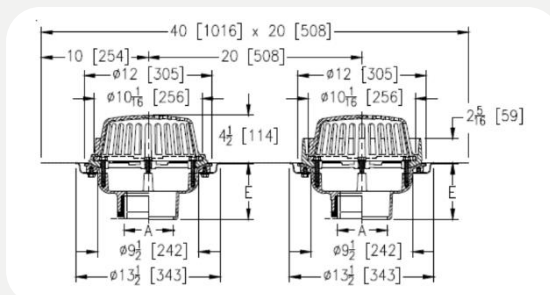

PRODUCT SPECIFICATION: 12" [305mm] Diameter roof drain and overflow drain, Dura-Coated cast iron bodies with combination membrane flashing clamp/gravel guards, double Top-Set deck plate, and cast-iron domes

A Pipe Size In.[mm]	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
2, 3, 4, 6 [51, 76, 102, 152]	66 [30]	78 [503]

PIPE SIZE	(Specify size/type)	OUTLET	'E' BODY HT. DIM.
2, 3, 4, 6 [51, 76, 102, 152]	_C	Inside Caulk	5-1/4 [133]
2, 3, 4, 6 [51, 76, 102, 152]	_P	Threaded	3-3/4 [95]
2, 3, 4, 6 [51, 76, 102, 152]	_NH	No-Hub	5-1/4 [133]
2, 3, 4 [51, 76, 102]	_NL	Neo-Loc	4-5/8 [117]

PREFIXES

RC - Cast Iron body Assembly Cast Iron Dome*

RA - Cast Iron body Assembly Aluminium Dome

SUFFIXES

- **AR** Acid Resistant Epoxy Coated Cast Iron
- **E** 2 [51] High Static Extension (Specify Height)
- **G** Galvanized Cast Iron
- **SC** Secondary Clamping Collar
- **SS** Stainless Mesh Screen Over Dome
- **TC** Neo-Loc Test Cap Gasket (2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)
- **VP** Vandal-Proof Secured Top
- **XJ** Vertical Expansion Joint
- **84** Stainless Steel Perforated Gravel Guard
- **85** Stainless Steel Perforated Extension