


## R1500

### PROM-DUCK ROOF DRAINS CAST IRON BODY WITH 14" SQUARE CAST-IRON HEAVY-DUTY GRATING

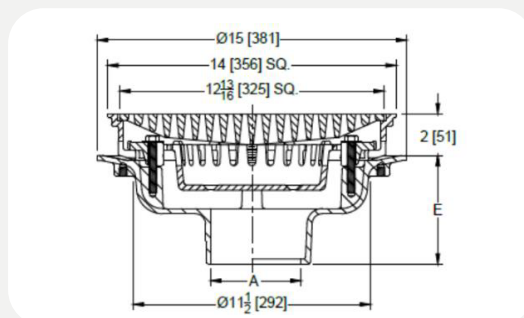

**PRODUCT SPECIFICATION:** 14" [356mm] Square Top Prom-Deck drain. Dura-Coated cast iron body with rotatable square promenade frame with seepage openings, frame clamps, heavy-duty heel-proof du resist grate and sediment bucket

A-Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area In <sup>2</sup> . [cm <sup>2</sup> ]
2, 3, 4 [51, 76, 102]	62 [28]	44 [284]
6 [152]		
8 [203]	63 [29]	

PIPE SIZE	(Specify size/type) OUTLET	'E' BODY HT. DIM.
3, 4, 6 [76, 102, 152]	_C Inside Caulk	5-1/4 [133]
2, 3, 4, 6, 8 [51, 76, 102, 152, 203]	_P Threaded	3-3/4 [95]
2, 3, 4, 6, 8 [51, 76, 102, 152, 203]	_NH No-Hub	5-1/4 [133]
2, 3, 4 [51, 76, 102]	_NL Neo-Loc	4-9/16 [116]

## PREFIXES

**RC** - Cast Iron body Assembly Cast Iron Grating\*

**RN** - Cast Iron body Assembly Polished Nickel Bronze Grating

## SUFFIXES

- **AR** Acid Resistant Epoxy Coated Cast Iron
- **C** Underdeck Clamp
- **DP** Top-Set® Roof Deck Plate
- **DE** Deck Extension
- **DR** Top-Set® Drain Riser
- **E** 2 [51] High Static Extension (Specify Height)
- **EA** Adjustable Extension Assembly  
2-1/8 [54] thru 3-1/2 [89]
- **EB** Top-Set® Adjustable Extension Assembly
- **DT** Decorative Polished Top (RN Only)
- **G** Galvanized Cast Iron
- **R** Roof Sump Receiver
- **SC** Secondary Clamping Collar
- **S** Secondary Strainer
- **ST** Dome with Solid Top
- **TC** Neo-Loc Test Cap Gasket  
(2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)
- **VP** Vandal-Proof Secured Top
- **XJ** Vertical Expansion Joint
- **W3** 3 [76] Internal Water Dam
- **W4** 4 [102] Internal Water Dam
- **85** Stainless Steel Perforated Extension
- **90** 90° Threaded Side Outlet Body