


R7120

12" FRAME AND GRATING SYSTEM

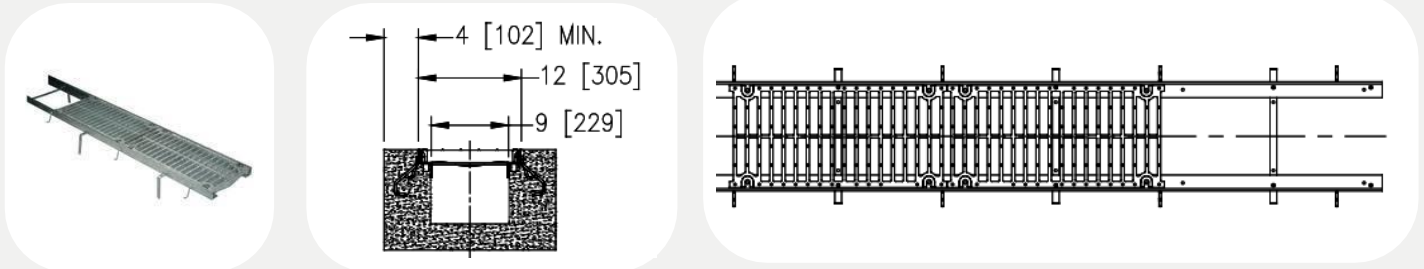

PRODUCT SPECIFICATION: Frame and Grate System with 120" [3048mm] long, 12" [305mm] wide and have a 8-1/2" [216mm] clear opening. Frame shall mechanically lock into the concrete surround every 10" [254mm]. Ductile Iron grate is rated class C per the DIN EN1433 top load classifications supplying with 24" [608mm] nominal lengths with 63/64" [25mm] wide slots, and 1- 1/2" [38mm] bearing depth. The Heavy- Duty Carbon Steel Frame powder coated Assembly with 1/4" [6mm] thick and 12 - 4" [102mm] long concrete anchors per 120" [3048mm]

SUFFIXES

- **BF** Black Acid Resistant Coated Frame
- **GF** Galvanized Frame Assembly
- **SF** Type 304 Stainless Steel Top Frame

GRATE OPTIONS

- **DGC** Ductile Iron Slotted Grate - Class C *
- **DGE** Ductile Iron Slotted Grate - Class E
- **BDC** Black Acid-Resistant Epoxy Coated Ductile Grate - Class C
- **BDE** Black Acid-Resistant Epoxy Coated Ductile Grate - Class E